

65" Wi-Fi Interactive Flat Panel

40 simultaneous touch points LED ULTRA HD

Integrated touch | Infrared technology | Android 11 20Wx2 integrated speakers | Ambient light sensor ScreenShare Pro license included | USB Type-C Full-Link

HC6520M

65" INTERACTIVE FLAT PANEL Wi-Fi **RDM-READY**











Zero Gap Technology allows sharper images with better contrast and reduced glare.

Automatic brightness adjustment via ambient light sensor.



Infrared technology touch screen; usable even with gloves or any other solid object.

Anti-glare tempered glass with Mohs 7 4mm thickness.



Integrated 20Wx2 front stereo speakers. Total power 40W



HDMI 4K input Updated interface and electronics 3x HDMI IN, 4x USB 2.0, 2x TOUCH OUT 2x LAN (RJ45 - Autoswitching) 1x USB type-C Full-Link



Quad Core A55 4GB RAM, 32GB ROM **OPS Standard slot**

SI07 Wi-Fi and Bluetooth module included



Remote Display Management license included (1 year)*

Software Touch Display + included (perpetual license)

ScreenShare Pro included (perpetual license)





Zero Gap bonding

Direct bonding

The touch panel and the glass surface are bonded without interspace by means of highly transaparent liquid adhesives. There is therefore no empty space between the outer glass and the LCD panel.

Touch Display +



3.0 Teaching Tools dedicated to teachers and students.

Note | Note plus | Capture | AirClass 2.0 | Bytello (Perpetual license included).

ScreenShare Pro included (Perpetual license)



RDM Ready

Remote Display Management




With Chimpa RDM you can remotely control, view and manage the functioning of the Interactive monitor with Android.

Two steps are enough to register the device in your administrative panel.

What are the advantages of Zero Gap?

Thanks to the improvement of the optical refraction between touch and LCD, the monitor will have excellent readability, even in high light conditions, optimized contrast and less reflections. In addition, the monitor will be even more accurate to touch inputs. The absence of air prevents the formation of condensation and the proliferation of mold and bacteria on the screen, thus ensuring maximum hygiene.

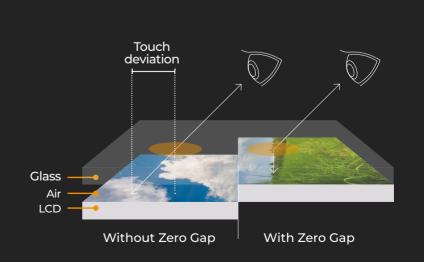

Bottom panel



Pens with iron core


Magnetic attachment to the monitor




one pen

Front panel Side panel



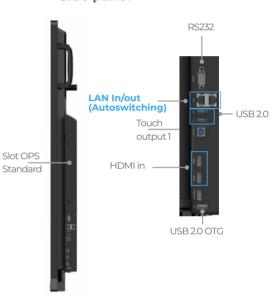



(D)

USB Type-C Full-Link





USB Type-C Full-Link is based on USB 3.2 Gen 2x2 with a transfer velocity of 20 Gbps thanks to two 10 Gbps lines that work in parallel.



SINGLE INTERFACE

With only one cable it will be possible to transfer 65W, **Audio** and **Video** up to **4K** quality, computer touch signal and network connection between the monitor and compatible devices.

CONNECTION WITH ONLY ONE CABLE

LAN In/out

Autoswitching




Two RJ45 ports

The autowitching systems allows to connect the IFP, OPS PC (not included) and any external compatible device in an intuitive way, thanks to interchangeable port in both input/output without external switch or cables.

1000Mbps internet *speed* at full **potential**

CONNECTING DEVICES IT HAS NEVER BEEN EASIER

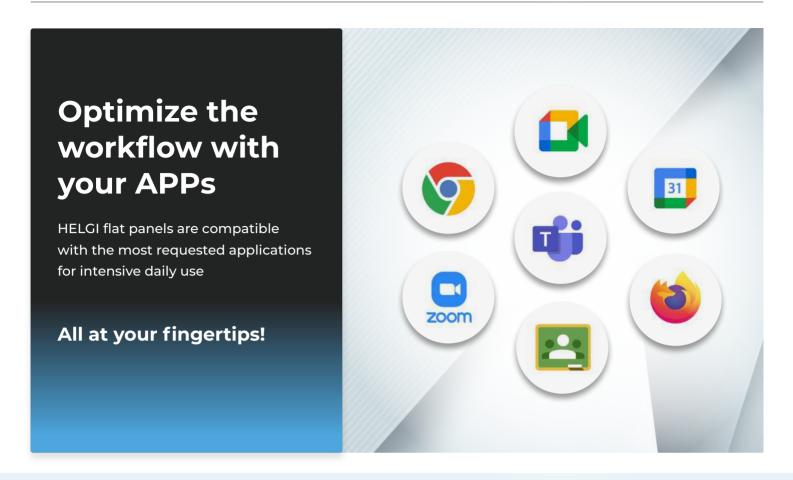

Note

Interactive board Android software (Perpetual license included)

Application for Android





Simplified
writing tools

Configurable workspace

Advanced additional drawing tools

Screen and external webcam recording

Export and direct sharing in the Cloud



NotePLUS

Software for lectures and presentations (Perpetual license included)
Windows application





Download Software

Subject-specific teaching tools

PowerPoint presentation tool

Export to document format

Auto save | Auto update

Configurable page layout

Speech synthesis of the text

Three different working modes

Hypertext links

Advanced drawing mode

Capture

Recording & Editing video lessons (Perpetual license included)

Windows application



EasiCapture is a complete software for recording and audio/video editing of lectures, video tutorials and video courses. It is an extremely powerful, flexible and easy-to-use solution designed both for teachers, who want to work in an innovative way, for example with a "flipped classroom" approach, and for the entire class when they want to create videos and films of any kind.



Video recording

Screen capture
Capture from peripheral
(webcam, document camera etc.)
Full screen capture
Capture a customized portion
of the screen

Audio recording

Microphone recording Recording from external audio source System audio recording

Video editing

Unlimited tracks
Clip cut
Audio track separator
Video material library
Zoom and video transitions
Insert text | Insert watermark
Insert external files (pictures, audio etc.)
Export in .mp4 format



Bytello


To prepare and share the lessons (Perpetual license included)

Application for Android

Bytello Class

Bytello Class is an Android app that allows the teacher to share the lecture with the students. Each teacher can log-in into the cloud service to create the lessons with its own contents and expand them with the tools made available by the plattform. The lessons are saved on the account of the teacher and they are available at anytime and on any device.

Thanks to the dedicated application installed on the Interactive Flat Panel is it possible to show these lessons to the students that have the possibility to partecipate to the lesson. They also have the possibility to answer to questions with the use of their onw devices, by simply logging in on the website and use the six digit code shown on the application

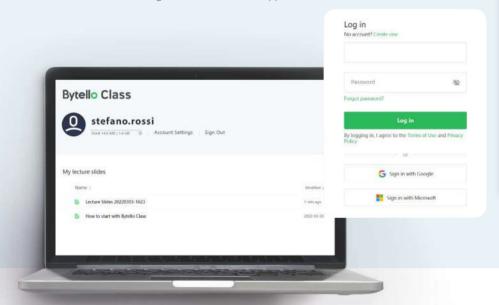

Animations for the presentation

Save the file on the cloud

Interaction with the students

Magnetic link of the object

2 and 3 dimensions tools


Customizable exercises

Activities

Subjects

0

Mind Map

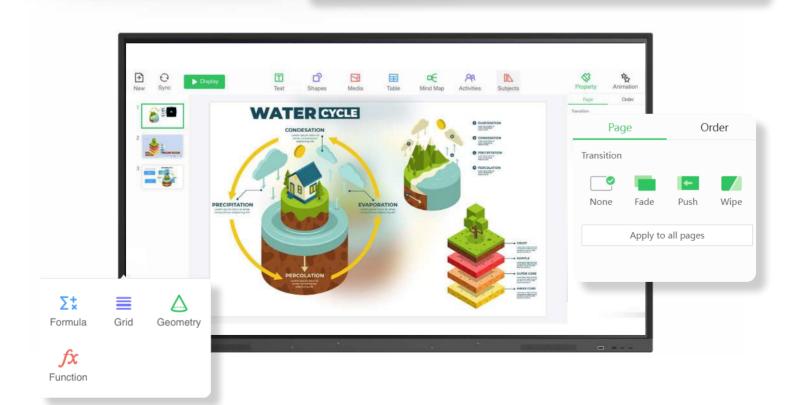

P

Shapes

4

Media

Ŧ

Table

T

Device Slot-in





Software included

Chimpa RDM



Chimpa RDM is a Remote Display Management software solution which allows you to manage, monitor, diagnose and protect devices with Android, used within your organization from data theft and computer intrusions. You need just a few minutes to activate Chimpa and its ease of use makes it suitable even for inexperienced users.

First year license included

ScreenShare Pro



Wireless mirroring
File sharing
Multidevice collaboration

Compatible with Windows, MacOS, Linux, iOS and Android. It allows to perform bi-directional mirroring in split-screen mode.

Remote Display Management



(1 year license included)

Chimpa RDM is a remote device management solution specifically developed for interactive flat panels. Thanks to its advanced features and its versatility, Chimpa RDM can be used in various areas of use:

Meeting rooms

Schools and training centers

Retail and Large distribution



Activate your license

The main features of Chimpa

App and content distribution



With Chimpa you can distribute apps and contents, private APKs, settings and updates from a simple browser panel. In Chimpa Admin Panel you can use official stores or Cloud services, such as Google Drive, Dropbox and OneDrive. You'll just need to perform a few simple steps to send to all, or only to some, the managed devices specific documents and contents or an application to be used.

Kiosk mode and single-App mode



Thanks to Chimpa the flat panel can be set to a specific welcome screen for your school/organization or be configured in Kiosk mode to allow the use of only single application.

Profile management and restrictions



Chimpa allows you to manage user profiles, guest profiles and even specific restrictions based on a single device or a certain time slot. Chimpa keeps your company safe from any inappropriate use of devices, thus allowing you to manage separately personal and work data, in full compliance with GDPR at European rules an excellent solution in a BYOD approach.

Monitoring and remote assistance



Chimpa RDM can monitor and keep record of all hardware and software use reports, notifying any operating anomalies. Furthermore, thanks to the Remote Commands Input section, the supervisor can interact with the monitor as if he/she were physically close to it: this means that it is possible to provide technical assistance and maintenance remotely. Finally, from the Chimpa Admin Panel it is possible to view what the interactive monitor is showing in real time and take control of the device with a simple graphic interface.

Complete

Chimpa allows you to have full control over your organization's

User-Friendly

Clear and intuitive Admin Panel, suitable for users of any level.

Safe

It protects your organization from inapproriate uses of devices, allowing you to manage the division between personal and corporate data.

Customizable

Specific configuration according to your needs and methods of use.

Certified

Chimpa's developer company is the only one in Italy to be an Android Enterprise Mobility Management service provider.

Easy Enrollment

HELGI is the only Italian brand able to offer you a complete package right from the first start-up of your devices in just a few taps.

ScreenShare Pro



Included

ScreenShare Pro is a wireless mirroring, sharing and multidevice collaboration solution. The license (perpetual) allows you to activate the ScreenShare Pro server app of the interactive monitors and there is no limit to the number of client devices (Windows, MacOS, Linux, iOS and Android) that can be connected to it using the same Wi-Fi network.


Among the main features, ScreenShare Pro allows for bi-directional mirroring (from server to client and from client to server) in split-screen mode up to a maximum of 9 devices connected simultaneously.

Remote control of Windows, MacOS and Linux devices through touch input from the monitor, sending of image, audio and video files in real time from client to server, annotation on shared documents.



Mirroring from device to interactive flat panel

(Max 9 devices simultaneously)

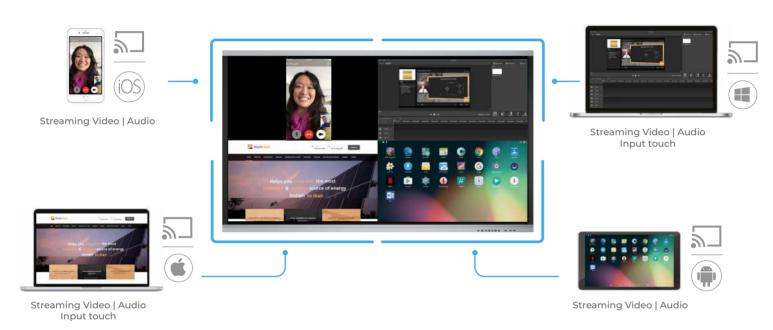


Mirroring from interactive flat panel to device

(Max 1 device)



ScreenShare Pro

Included

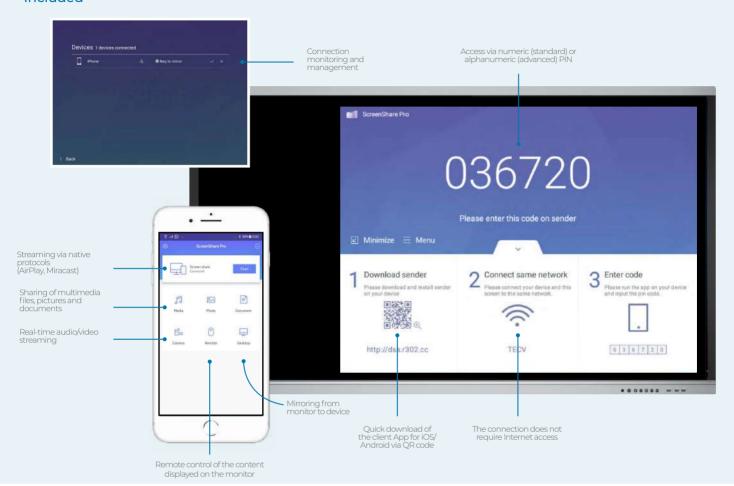


Technical specification

ScreenShare Pro

Code	HLG-SSP					
License type	Perpetual, to be activated on the monitor's Android OS after installing the .apk server file					
Compatibility	Android (Interactive monitor server), Windows, MacOS, Android, iOS (client device)					
Connection	Wi-Fi on the same network (does not require Internet access)					
Access	With 6-digit PIN					
Security	Display of client devices connected via Master Mode. Ability to accept/refuse connection requests and disconnect managed devices. Ability to define the refresh rate of the connection PIN. Possibility to activate the advanced connection via alphanumeric PIN.					
Split screen	Possibility to view up to a maximum of 9 devices connected simultaneously on the same screen; + function to bring a device to full screen					
Presentations	Support for PowerPoint, KeyNote, PDF slide management; drawing tools and real time annotation on presentations, virtual laser pointer					
	iOS, Android	Sharing media files (photo, audio, video) from local library				
		Sharing documents from local library				
		Audio/video streaming sharing from the device camera				
		Remote control of the contents displayed on the monitor (one client device at a time; possibility to choose between interaction via touchpad mode or motion mode). Supported commands: left click, right click, drag & drop, on-screen keyboard.				
Client tools		Mirroring from monitor to device with remote control of the contents displayed on the monitor (up to a maximum of 9 client devices at a time; supported commands; left click, right click, pinch and zoom, drag & drop, on-screen keyboard.				
		Mirroring from device to monitor via native protocols (AirPlay for iOS, Miracast for Android)				
	Windows, MacOS	Mirroring from monitor to PC with remote control of the contents displayed on the monitor (one client PC at a time; supported commands: left click, right click, pinch and zoom, drag & drop, on-screen keyboard)				
		Mirroring from PC to monitor with remote control of the contents displayed on the monitorthrough the touch screen interface (up to a maximum of 9 client PC at a time;supported commands:left click, right click, pinch and zoom, drag & drop, on-screen keyboard)				

Motorized carts and stands

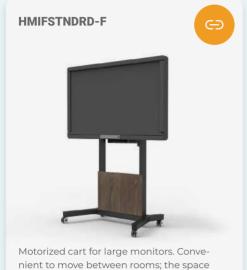

between the wheels allows easy access even with a wheelchair. Lower panel is optional and customizable

to fit with the location style.

Flat panels from 32" to 95" / VESA max 800x600 Height adjustment: 60 cm

Min / max height from floor (to display centre): 84,7 / 167,8 cm

Maximum weight: 160 kg.



Motorized fixed wall to floor stand. Compatible with any type of wall, as the weight lies to the floor. Designed to get free distance between the wall and the back of the stand.

Flat panels from 32" to 95" / VESA max 800x600 Height adjustment: 65 cm

Min / max height from floor (to display centre): 77,8 / 165 cm

HLG604722B

Maximum weight: 150 kg.



Mobile cart with double telescopic column with a thin profile. Convenient to move between rooms; the space between the wheels allows easy access even with a wheelchair.

Display orientation: only landscape.

Flat panels from 32" to 95" / VESA max 800x600 Height adjustment: 65 cm Min / max height from the ground (in the center

of the display): 84,7 / 167,8 cm Maximum weight: 100 kg.

Manual carts and stands




Flat panels from 60" to 100" / VESA max 1000x600

 $\operatorname{\mathsf{Min}}/\operatorname{\mathsf{max}}$ height from the ground (in the center of

Height adjustment: 40 cm

the display): 123 / 163 cm Maximum weight: 100 kg.

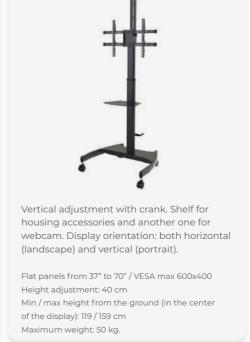

Fixed carts and stands

HLG604740B



Mobile cart adjustable in height only during assembly. Sturdy steel base and shelf for housing accessories. Shelf for webcam.

Flat panels from 60" to 100" / VESA max 1000x600 Min / max height from the ground (in the center of the display): 135 / 167 cm Maximum weight: 100 kg.

HLGFS16



Fixed wall bracket and weight unloading on the ground. Ideal for weak or plasterboard walls where it is required to unload the weight to the ground.

Quick release system of the monitor.

Flat panels from 32" to 86" / VESA max 800x600 Height adjustment: 60 cm

Min / max height from the ground (in the center of the display): $110/170~{\rm cm}$ Maximum weight: $90~{\rm kg}$.

HLGMOVMIFFLX





Carrello mobile con doppia colonna telescopica. Regolabile in altezza solo in fase di montaggio. Struttura leggera con solida base ad H.

Flat panels from 32" to 86" / VESA max 800x600 Min / max height (in the center of the monitor): $19/219,3\,\mathrm{cm}$

Maximum weight: 80 kg.





In addition to the supplied software, withHELGIyou can expand the possibility of using the Interactive Flat Panel thanks to some specific accessories. The solutions are designed for the most frequent needs in the corporate/educational fields, to make the Interactive Flat Panel the fulcrum of business/educational collaboration.

Wireless Collaboration

The solution dedicated to internal business collaboration and training: with the integrated OPS module, it will be possible to use the display like a real computer with all the features of Windows.





H64I7108256

HLGMOVMIFFLX

Corporate Solution

(Standard)

The solution for small/medium sized huddle and conference rooms: it includes the display, cart, OPS module and webcam.









H64I7108256

HLGMOVMIFFLX

61U3100000AM

Corporate Solution

(Advanced)

The ideal solution for meeting rooms: compared to the standard version, it includes an A/V soundbar that includes webcam + speakers in an all-in-one solution suitable for larger rooms.









H64I7108256

HMIFMINI-F100


61U3200000AC

Customized solutions on request

	Code HC6520M							
	Lighting	Direct type LED						
	Quality	Grade A						
	Display area	142,8 x 80,3 cm						
	Diagonale	65"						
	Aspect ratio	16:9						
	Resolution	UltraHD 4K						
DISPLAY	Color depth	1.07 billion (10 bits)						
DISI	Brightness	560 cd/m ²						
	Contrast	6.000:1						
	Viewing angle	178° V / 178° H						
	Refresh rate	60Hz						
	Response time	2.5 ms						
	Sensors	Ambient light						
	Touch technology	Infrared matrix						
	Driver	HID						
	Simultaneous touch points	Up to 40 (Windows)						
王	Input tools	Fingers (even with gloves) or any other passive object						
ТОПСН	Object size	< 1.8 mm						
	Response time	< 1.4 ms						
	Accuracy	±0.5 mm						
	Input resolution	32767 x 32767						
DATA	Surface	Anti-reflective tempered glass 4mm Mohs level 7						
DATA	External dimensions	148,9 x 89,7 x 8,6 cm (L x H x D)						
ТЕСН. DATA	External dimensions Net weight	148,9 x 89,7 x 8,6 cm (L x H x D) 40,2 Kg						

INTERFACE	Input	3x HDMI IN (1x front), 1x USB type-C Full-Link (front), 1x VGA IN, 1x PC AUDIO IN, USB 2.0 OTG, 4x USB 2.0 (2x front), 2x TOUCH OUT (1x front), 1x RS232, 2x LAN (RJ45 - Autoswitching)			
	Output	1x Audio Ol	JT, 1x COAX Out		
	Connectivity	Ethernet LAN, Wi-Fi, HotSpot, Bluetooth			
	Speaker power	20W x 2	20W x 2		
	OPS slot	Compatible with OPS Standard			
	System version	Android 11			
10	Compatible applications		oogle Apps, Microsoft Office, Microsoft sco Webex, Zoom, Google Chrome, Mozilla type		
ANDROID OS	App installation		mpatible with the Android version of action can be deactivated)		
ANDI	СРИ	Quad Core A55			
	GPU	Mali G52 GP2			
	RAM	4 GB			
	SSD	32 GB			
	Maximum consumption 235W				
ENERGY	Standby consumption	≤0.5W (Standby)			
Ä	Lifetime	60.000 hours			
	Operating time	24/7			
IES	Content of the package	1x USB (5m)	Power cord (3m), 1x HDMI (3m),), User manual, 2x Passive pens control (batteries included).		
ACCESSORIES	Included software	Capture (W	oid), Note ^{plus} (Windows) (Indows), ScreenShare Pro (Android) (Android), Bytello		
A	Chimpa RDM included license		enrollment*		
Cer	tifications		Warranty		
Ene	EnergyStar**, ROhS, CE, SGS***		3 years on centre		
Admitted languages			Catalan, Czech, Danish, German, Estonian, English, Spanish, French, Croatian, Italian, Hungarian, Dutch, Norwegian Polish, Portuguese, Romanian, Turkish Swedish, Greek, Russian, Arabic, Chinese Japanese, Lithuanian.		

Environmental Conditions							
Operation Temperature	Operation Humidity	Storage Temperature	Storage Humidity	Altitude			
0°C~40°C	10%~90%RH	-20°C~ 60°C	10%~90%RH	below 5000 meters			

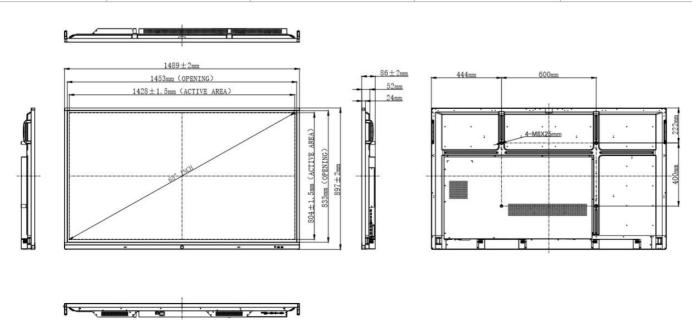













www.HELGI-europe.com

HELGI Europe
education@helgi-e

education@helgi-europe.com business@helgi-europe.com

#050422HC6520M_EN

Distributor